

LAMINATE FLOORING 2023 - 2024



ALSAFLOOR



IN-REGISTERED


RESISTANT

SUSTAINABLE

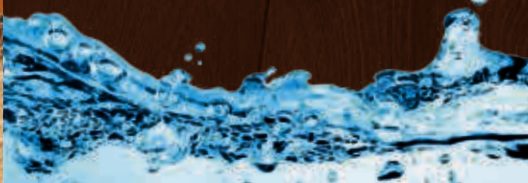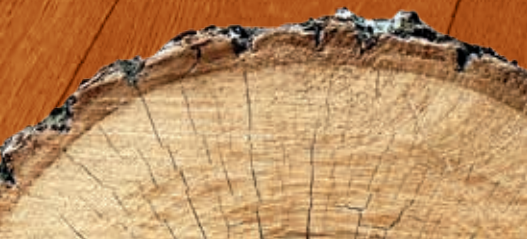

ALSAFLOOR

FRENCH QUALITY LAMINATE FLOORING.

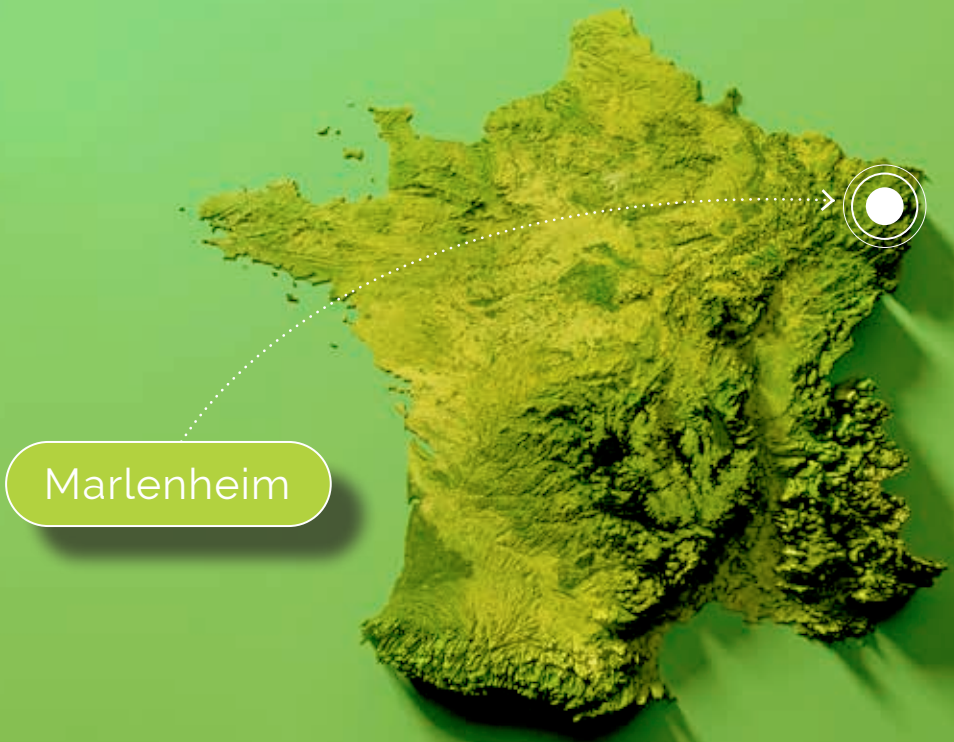

Marlenheim

Our vision for tomorrow's planet !

OUR DREAM PROJECT

Key points are Waste, Resources, Energy, Alsaflooring and Emissions.

This environmentally-focused strategy is applied across the whole company to prevent any negative effects on our planet.

All of us, employees, customers, partners and suppliers alike, are involved in this sincere and realistic project.



Learn more about our project in video

Why choose ALSAFLOOR ?



CHOOSE A FRENCH MANUFACTURER !

Our plant is located in Alsace and we are the only laminate manufacturer in the country.



A SHORT CIRCUIT VALUED

We source our materials via short supply chains in France and the EU.



A MANUFACTURER PROUD OF ITS EFFORTS FOR THE ENVIRONMENT

Our factory is fitted with photovoltaic panels and a biomass boiler. We burn our wood waste (sawdust) to produce hot water and heat our plant.

CONTENTS

Page 4

Page 5

Page 6

**ALSAFLOOR RANGES
SURFACE STRUCTURES
WATER RESISTANT**

Pages 7 to 13

Pages 8 & 9

Pages 10 & 11

Pages 12 & 13

12 mm

HERRINGBONE 12 MM

SOLID PLUS

SOLID MEDIUM

Pages 14 to 25

Pages 16 & 17

Pages 18 & 19

Pages 20 & 21

Pages 22 & 23

Pages 24 & 25

8 mm

ELEGANT HERRINGBONE

ELEGANT

ELEGANT MEDIUM

OSMOZE

CLIP400

Pages 26 to 30

Page 31


Pages 32 & 33

Pages 34 & 35

**DESIGNS
PRODUCT RANGES
TECHNICAL FEATURES
ACCESSORIES**

ALSAFLOOR

A 100% WATER RESISTANT AND IN-REGISTERED RANGE

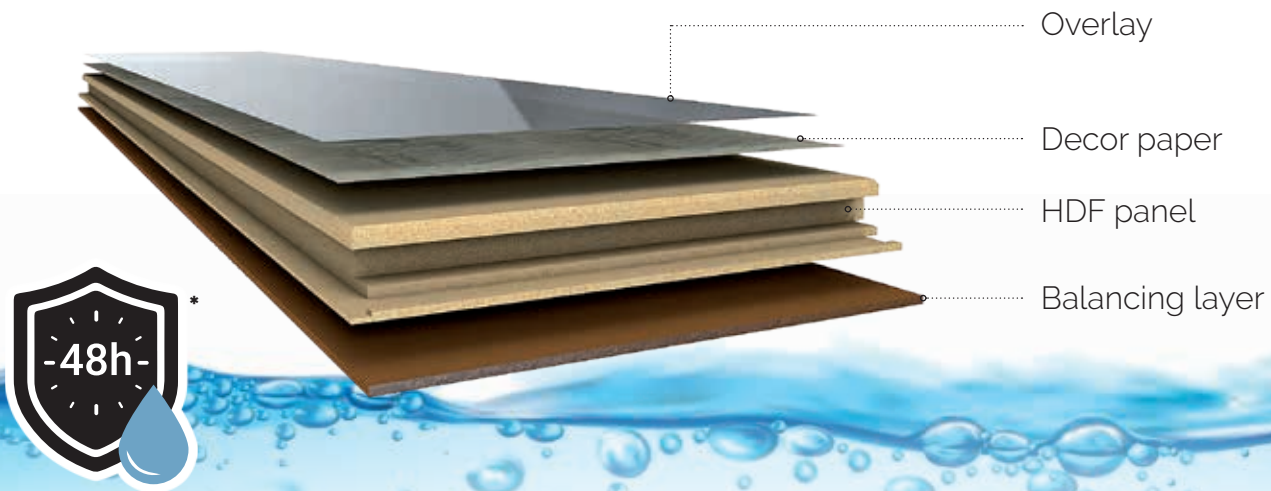

LAMINATE RANGES

12 mm
RANGE

HERRINGBONE

AC6



35
YEARS
GUARANTEE




SOLID PLUS

AC6



35
YEARS
GUARANTEE



SOLID MEDIUM

AC6



35
YEARS
GUARANTEE



ELEGANT
HERRINGBONE

AC5



25
YEARS
GUARANTEE



ELEGANT

AC5



25
YEARS
GUARANTEE




ELEGANT MEDIUM

AC5



25
YEARS
GUARANTEE



OSMOZE

AC5



25
YEARS
GUARANTEE




CLIP 400

AC5



25
YEARS
GUARANTEE



SURFACE STRUCTURES




In-Registered texture



A raised surface **along the wood veins** offers a strikingly realistic sense of authenticity !




In-Registered texture heliochrome

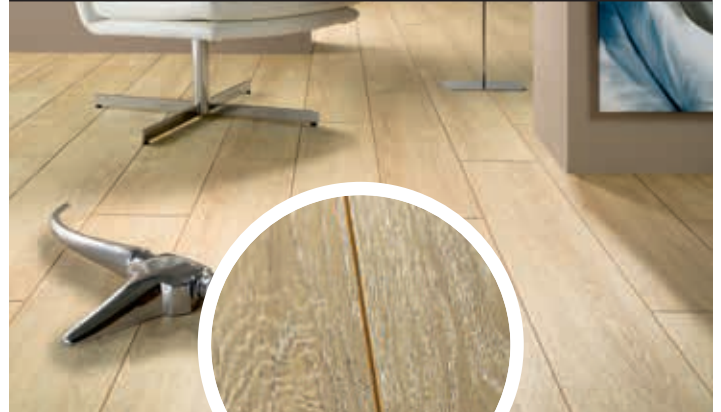


A mat / glossy effect (**mat on the surface and glossy in the wood grain**) for a deeper and more apparent structure.

CLIP SYSTEMS



A clip system that locks the planks together.



Designed and patented by Alsaflooring. Does away with the need for a left and right plank.

CLASSES OF USE 100% INTENSIVE USE



Abrasion resistance
AC5 AC6



Heavy domestic and heavy commercial use.

STANDARDS



Greenguard and Greenguard gold certified.



Top quality hdf panel



*Information as to emissions of volatile compounds in the indoor air, which might be harmful to the health when inhaled, on a scale from Class A+ (very low emissions) to C (high emissions).




Our products are made from wood taken from sustainably managed forests and PEFC™ certified.



The EC symbol on all our products certifies that they are produced in compliance with currently applicable standards and that they can move freely between countries within the European Community.

A water-resistant laminate flooring

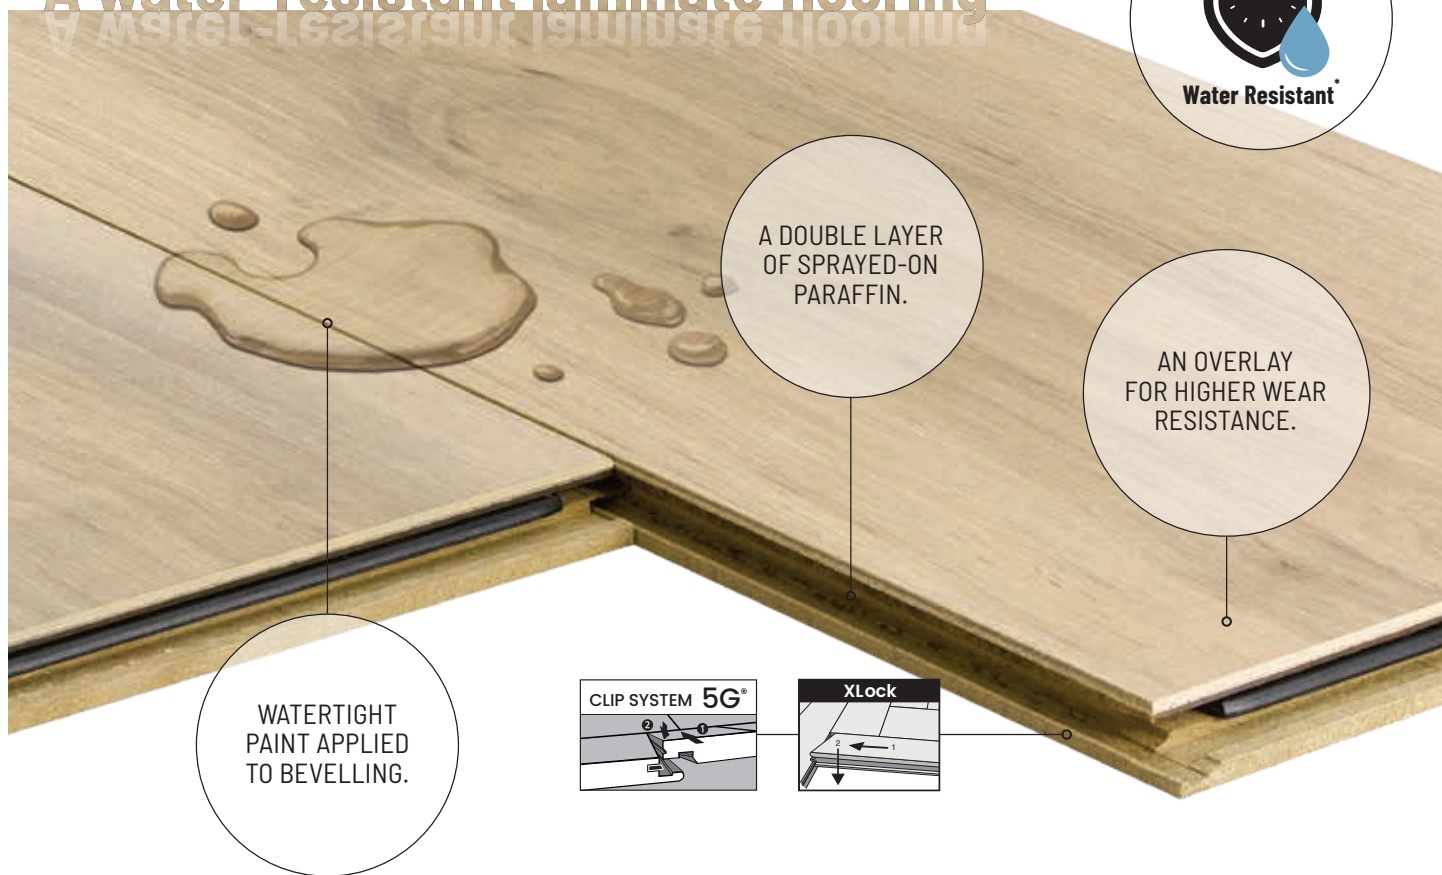

WATERTIGHT PRODUCTS

We use innovative technology based on the application of waterproof paint on the bevelling and a specific-purpose impermeable paraffin to make our assembly system watertight. Our WR products comply with NALFA level I requirements.

HARDWEARING PRODUCTS

Our WR products are rated AC5 and AC6 for wear resistance, allowing them to be fitted in any household room and in business premises (moderate to intensive use - class 23/33). Our 5G and XLOCK assembly systems are the guarantee of a robust, stable installation.

ENVIRONMENTALLY FRIENDLY

The whole of our range is PEFC™ certified, offering verified assurance that all the wood used in it originates from sustainably managed forests. Our WR range is rated A+, for indoor air quality.

Do not forget

UNDERLAY
+ GROUT LINER
+ WR FILLER

*No change in appearance and swelling ≤ 0.2 mm. Test performed according to NALFA guidelines and the ISO 4760 standard.

ALSAFLOOR
RANGE

12 mm



Water
resistant*



708 ULYSSES

HERRINGBONE
SOLID PLUS
SOLID MEDIUM



HERRINGBONE 12 MM

An authentic, traditional design with an embossed finish produces a result stunningly similar to genuine parquet.




535 PRALINE OAK



542 CHOKEBERRY OAK



708 ULYSSES




SIMPLIFY
THE INSTALLATION,
ORDER YOUR STARTING
TRIANGLE KIT




2 triangles/box available
in every finish


WATCH NOW
ON YOUTUBE, THE
INSTALLATION OF THE
HERRINGBONE XLOCK !

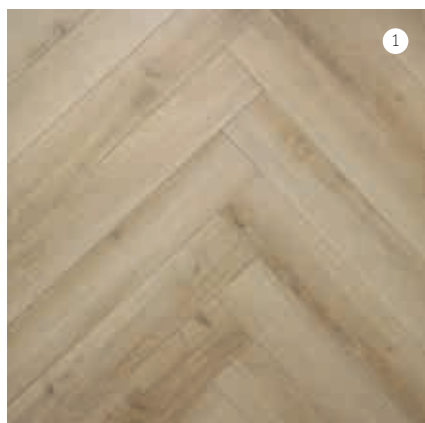


435 Jefferson

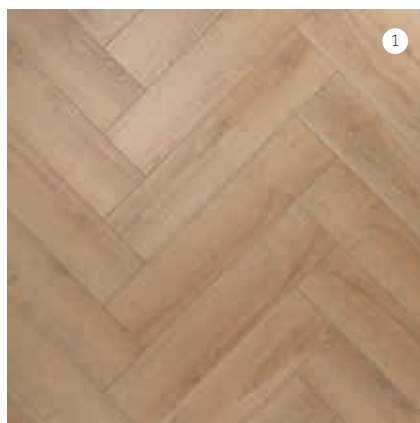


471 Sunset

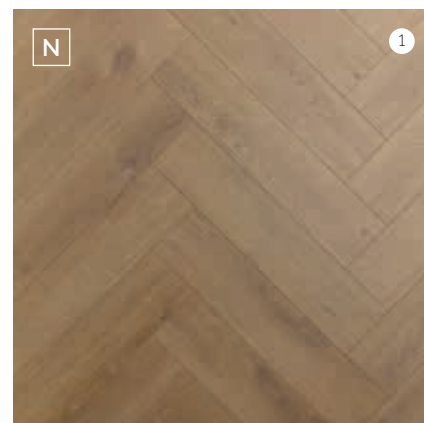


529 Almond oak

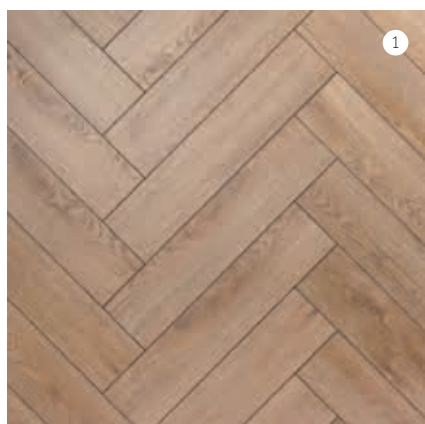


535 Praline oak

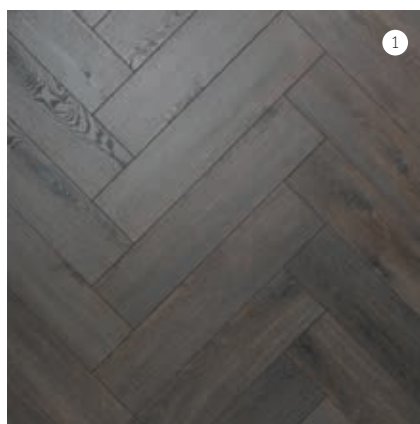


542 Chokeberry oak

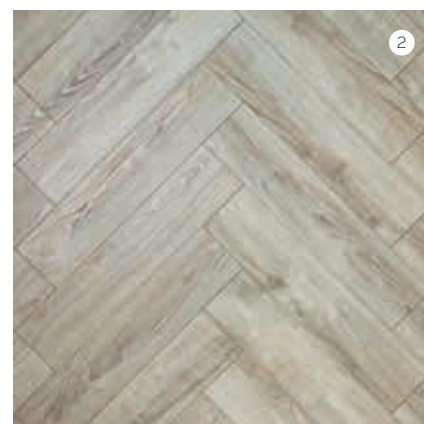


619 Sardinia oak

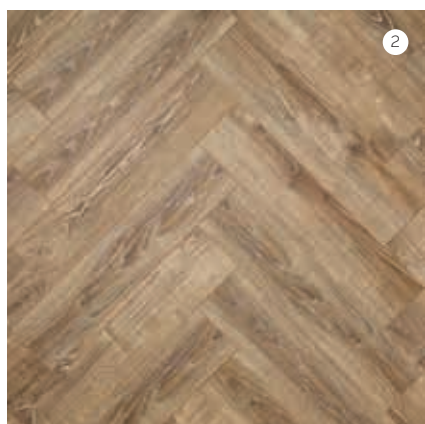

622 Balearic oak

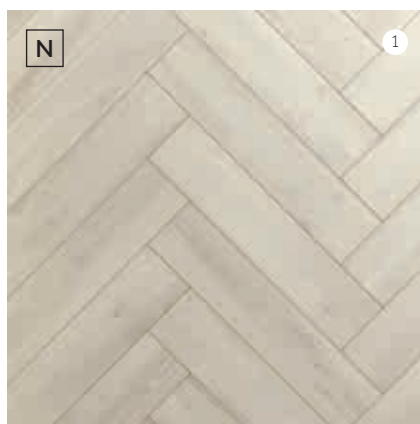

701 Plato

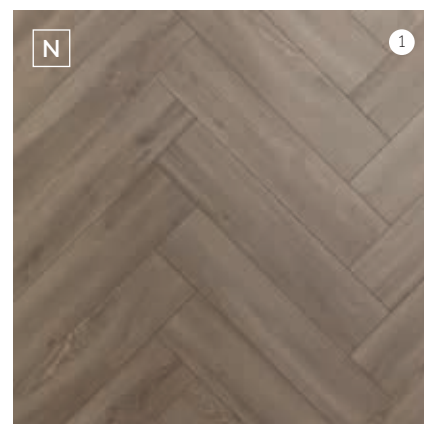

708 Ulysses

Technical features

Length:
644 mm - 25.35"

Width:
143 mm - 5.63"

Panel:
hdf

Planks/box:
13


Area/box:
120 m² - 12.91 sqf

Gross weight/box:
13.10 kg - 28.88 lb



SOLID PLUS


An extra-large width offers a laminate with a sense of depth, space and style.




559 CARMINE OAK



707 GORGIAS

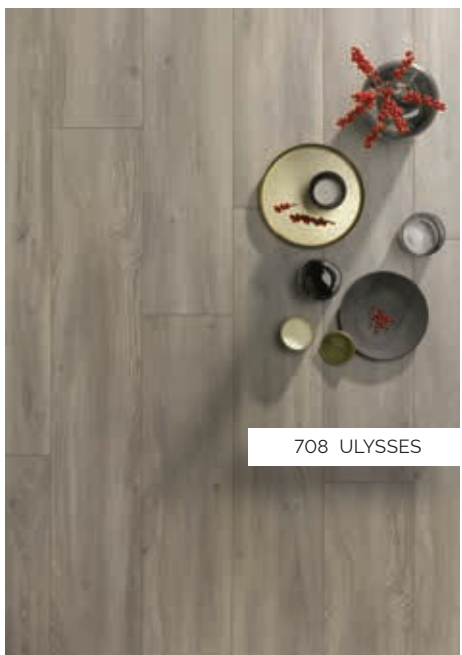

708 ULYSSES

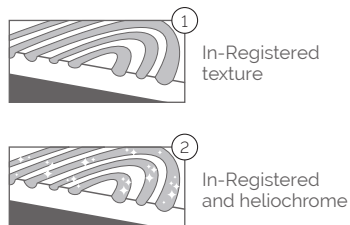

435 Jefferson




471 Sunset



514 Namur



518 Rafia

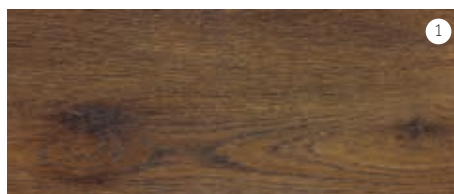

528 Chestnut oak




529 Almond oak



535 Praline oak



536 Linen oak

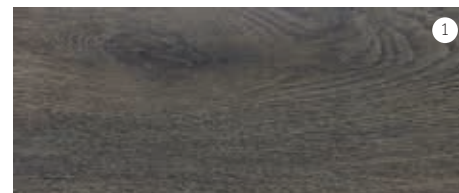

542 Chokeberry oak



559 Carmine oak



619 Sardinia oak



621 Canaries oak



622 Balearic oak



627 Polar oak




701 Plato



702 Aristotle



707 Gorgias

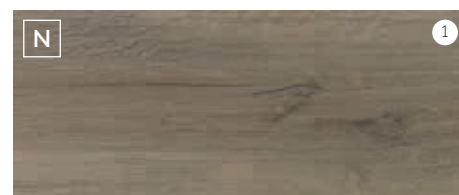


708 Ulysses

Technical features	Length: 1286 mm - 50.62"	Width: 214 mm - 8.43"	Panel: hdf	Planks/box: 6	Area/box: 1.65 m²- 17.76 sqf	Gross weight/box: 18.10 kg - 39.90 lb
--------------------	-----------------------------	--------------------------	---------------	------------------	---------------------------------	--




SOLID MEDIUM


All the features of the Solid range, specially designed for smaller areas.



701 PLATO



435 Jefferson

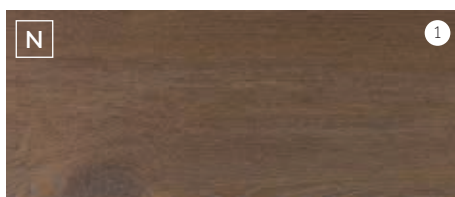

559 Carmine oak



619 Sardinia oak



621 Canaries oak



622 Balearic oak




701 Plato



702 Aristotle



707 Gorgias

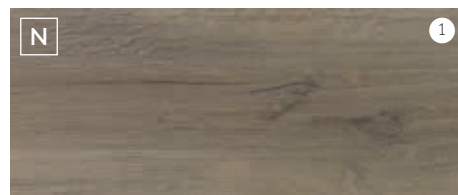

708 Ulysses

Technical features	Length: 1286 mm - 50.62"	Width: 122 mm - 4.80"	Panel: hdf	Planks/box: 6	Area/box: 0.94 m ² - 10.12 sqf	Gross weight/box: 10.50 kg - 23.15 lb
--------------------	-----------------------------	--------------------------	---------------	------------------	--	--

ALSAFLOOR
RANGE

8 mm



Water
resistant*

'hu:ge:/ [hue-guh]
nygge

707 GORGAS

ELEGANT HERRINGBONE

ELEGANT

ELEGANT MEDIUM

OSMOZE

CLIP 400

ELEGANT CONCEPT

*The Elegant style features streamlined,
timeless designs, producing appealing,
sophisticated interiors.
The ideal solution for emphasising
the intimacy of your surroundings.*



ELEGANT HERRINGBONE

A warm, classic pattern that brings out the unique warmth of the Elegant concept designs.



525 CALISSON OAK


SIMPLIFY
THE INSTALLATION,
ORDER YOUR STARTING
TRIANGLE KIT



Patented
triangles

2 triangles/box available
in every finish

WATCH NOW
ON YOUTUBE, THE
INSTALLATION OF THE
HERRINGBONE XLOCK !

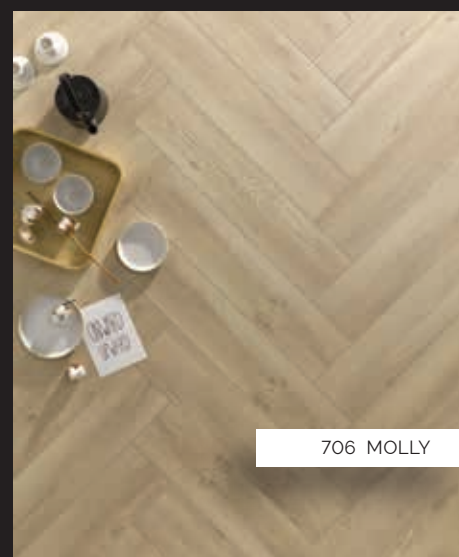


706 MOLLY




In-Registered
texture




511 KRAFT OAK

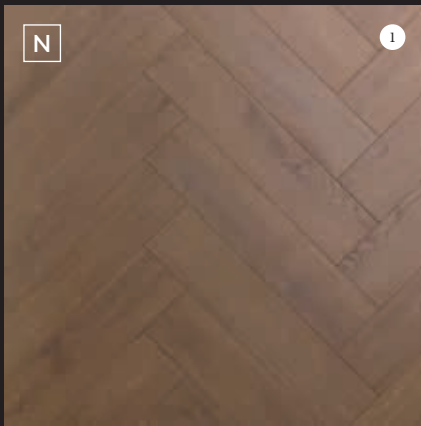


508 Bolero oak

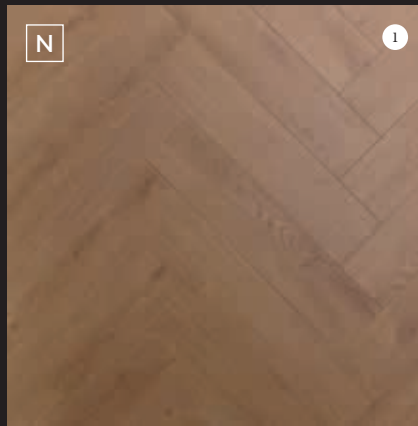


511 Kraft oak

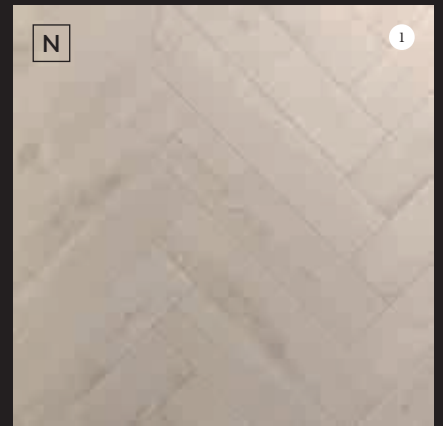


521 Aida oak

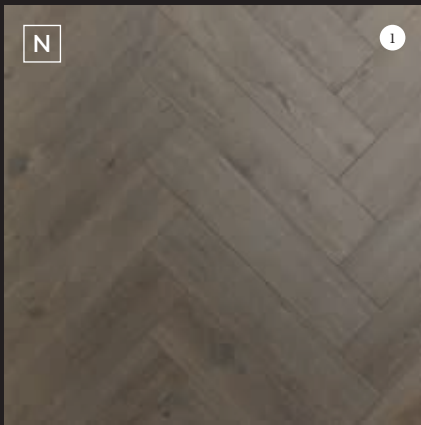


524 Poppy oak

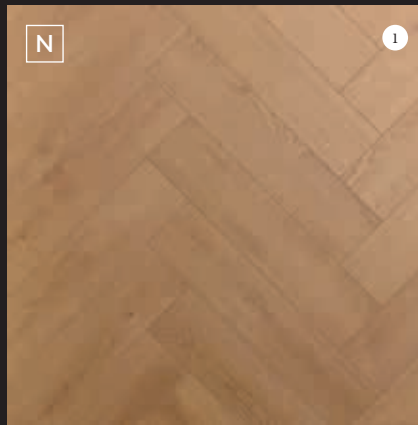


525 Calisson oak

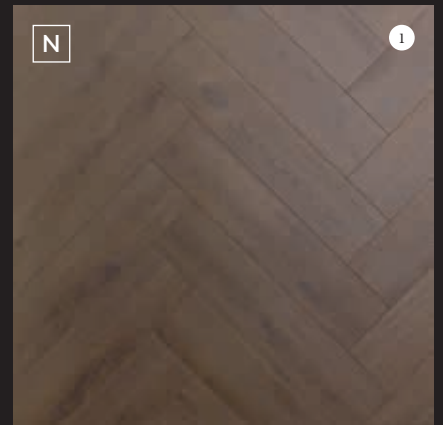


560 Stromboli

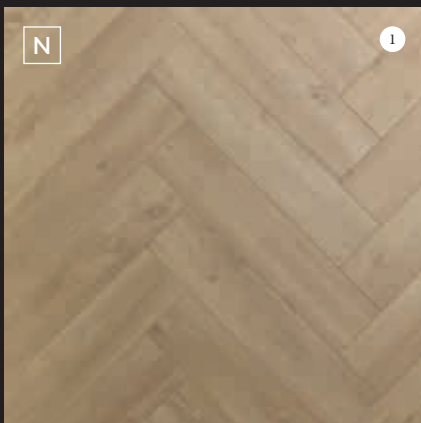

706 Molly

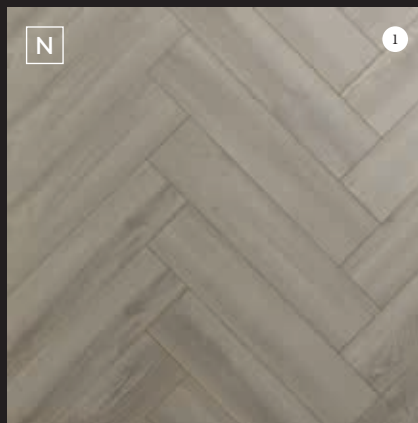

707 Gorgias

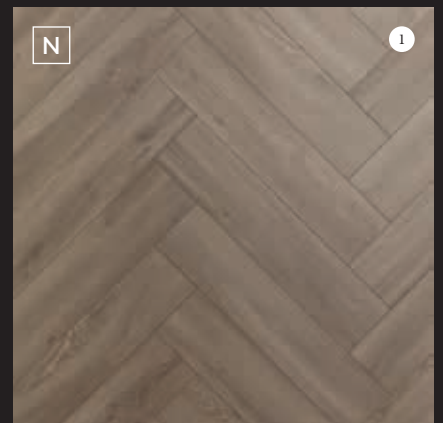

708 Ulysses

Technical features

Length:
644 mm - 25.35"

Width:
143 mm - 5.63"

Panel:
hdf

Planks/box:
20

Area/box:
184 m² - 19.81 sqf

Gross weight/box:
13.15 kg - 29 lb




ELEGANT

A comfortably sophisticated, warm look.



511 KRAFT OAK

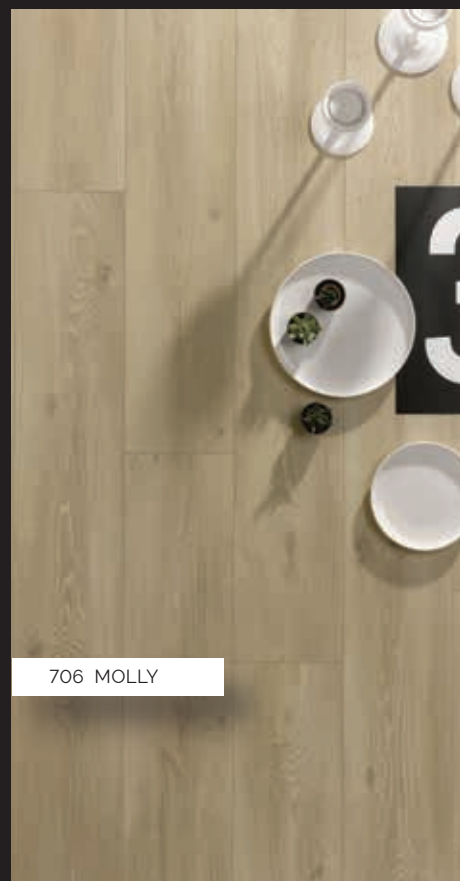

706 MOLLY



525 CALISSON OAK



In-Registered
texture




524 POPPY OAK



508 Bolero oak



511 Kraft oak

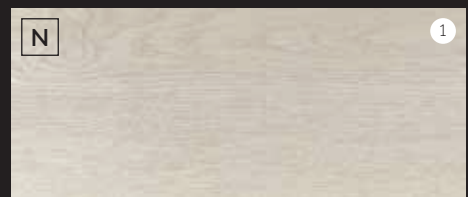

521 Aida oak



524 Poppy oak




525 Calisson oak




560 Stromboli



706 Molly

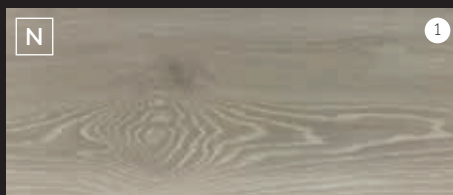

707 Gorgias

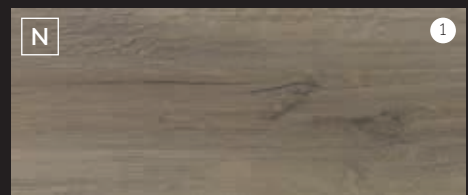

708 Ulysses

Technical features	Length: 1286 mm - 50.62"	Width: 192 mm - 7.56"	Panel: hdf	Planks/box: 9	Area/box: 2.22 m ² - 23.90 sqf	Gross weight/box: 16 kg - 35.27 lb
--------------------	-----------------------------	--------------------------	---------------	------------------	--	---------------------------------------



ELEGANT MEDIUM

122 mm planks offer unparalleled elegance.



508 BOLERO OAK



521 AIDA OAK




In-Registered
texture



560 STROMBOLI



508 Bolero oak

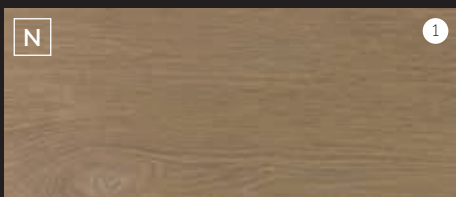

511 Kraft oak



521 Aïda oak



524 Poppy oak



525 Calisson oak



560 Stromboli



706 Molly



707 Gorgias



708 Ulysses

Technical features	Length: 1286 mm - 50.62"	Width: 122 mm - 4.80"	Panel: hdf	Planks/box: 9	Area/box: 141 m² - 15.18 sqf	Gross weight/box: 10.30 kg - 22.71 lb
--------------------	-----------------------------	--------------------------	---------------	------------------	---------------------------------	--





OSMOZE

A wide range of strikingly realistic designs for all preferences.


AC5

8 mm


25
YEARS
GUARANTEE



535 PRALINE OAK

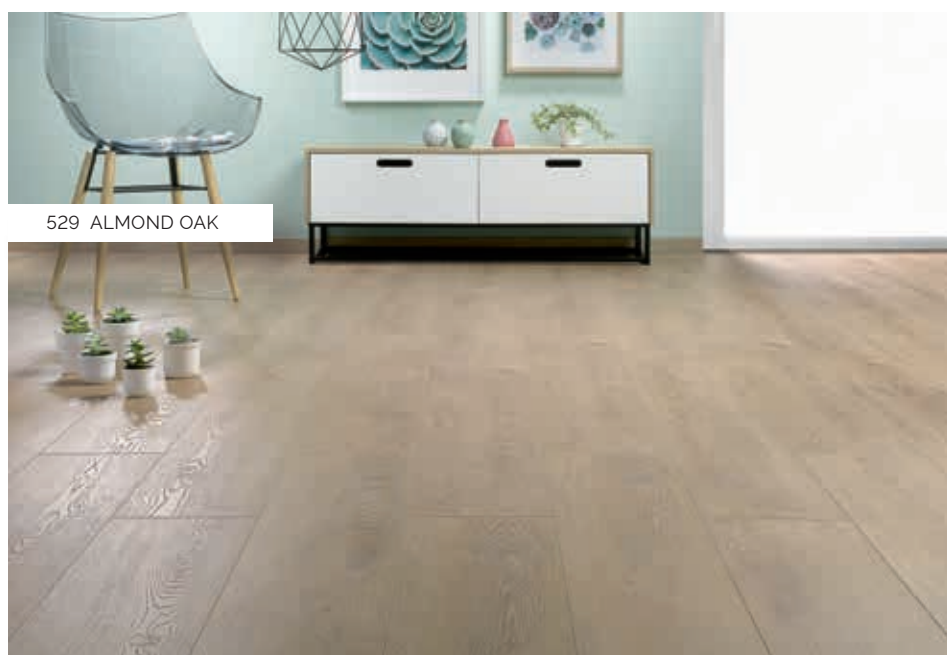

529 ALMOND OAK

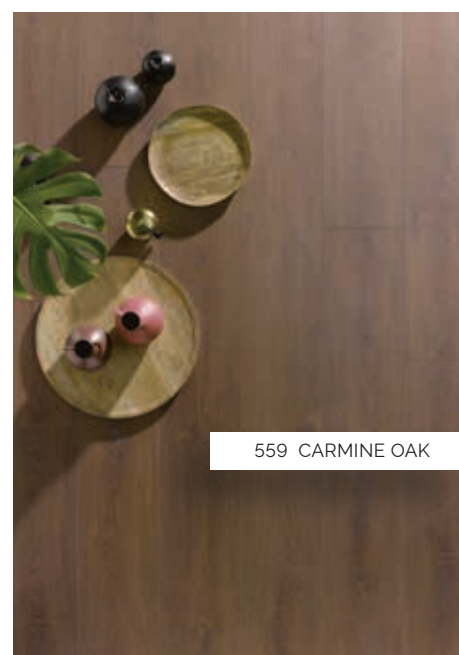


559 CARMINE OAK



420 Taza oak



436 Alpaca oak

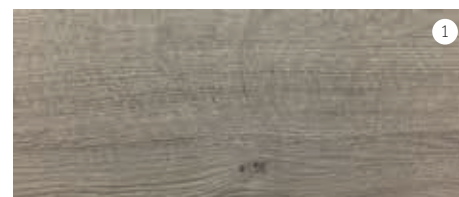

437 Grey building



448 Grey oak



449 Nevada oak




450 Nature oak



514 Namur



518 Rafia

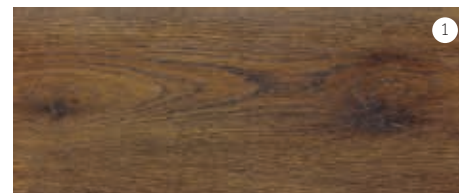

528 Chestnut oak



529 Almond oak




535 Praline oak




536 Linen oak



541 Coco oak

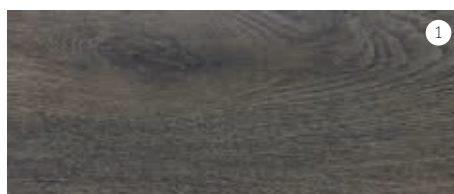

542 Chokeberry oak

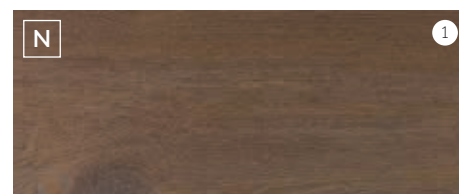

559 Carmine oak



701 Plato



702 Aristotle




705 Papyrus

Technical features	Length: 1286 mm - 50.62"	Width: 192 mm - 7.56"	Panel: hdf	Planks/box: 9	Area/box: 2.22 m ² - 23.90 sqf	Gross weight/box: 16 kg - 35.27 lb
--------------------	-----------------------------	--------------------------	---------------	------------------	--	---------------------------------------



CLIP 400

A wide choice of neat designs, without bevels, for all decorative ideas.



518 RAFIA




528 CHESTNUT OAK



420 Taza oak



436 Alpaca oak

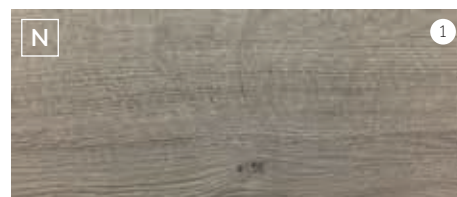

437 Grey building



448 Grey oak



449 Nevada oak




450 Nature oak



514 Namur



518 Rafia

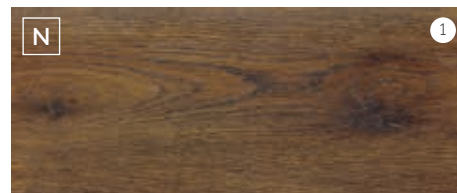

528 Chestnut oak



529 Almond oak




535 Praline oak




536 Linen oak



541 Coco oak

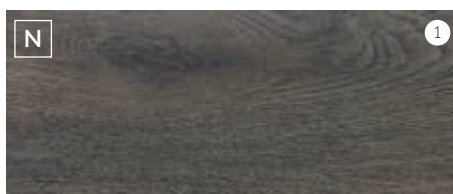

542 Chokeberry oak

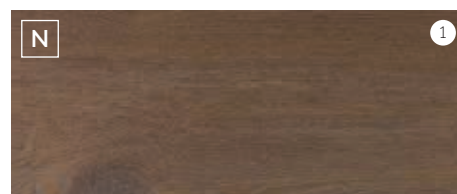

559 Carmine oak



701 Plato



702 Aristotle



705 Papyrus

Technical features	Length: 1286 mm - 50.62"	Width: 192 mm - 7.56"	Panel: hdf	Planks/box: 9	Area/box: 2.22 m ² - 23.90 sqf	Gross weight/box: 16.10 kg - 35.49 lb
--------------------	-----------------------------	--------------------------	---------------	------------------	--	--

DESIGNS



420 Taza oak
Available in the ranges
Osmoze / Clip 400



In-Registered
texture



435 Jefferson
Available in the ranges
Herringbone / Solid plus /
Solid Medium



In-Registered
texture



437 Grey building
Available in the ranges
Osmoze / Clip 400



In-Registered
texture



436 ALPACA OAK



436 Alpaca oak
Available in the ranges
Osmoze / Clip 400



In-Registered
texture



448 Grey oak
Available in the ranges
Osmoze / Clip 400



In-Registered
texture



449 Nevada oak
Available in the ranges
Osmoze / Clip 400




450 Nature oak
Available in the ranges
Osmoze / Clip 400



471 Sunset
Available in the ranges
Herringbone / Solid plus



508 Bolero oak
Available in the ranges
Elegant Herringbone / Elegant /
Elegant medium

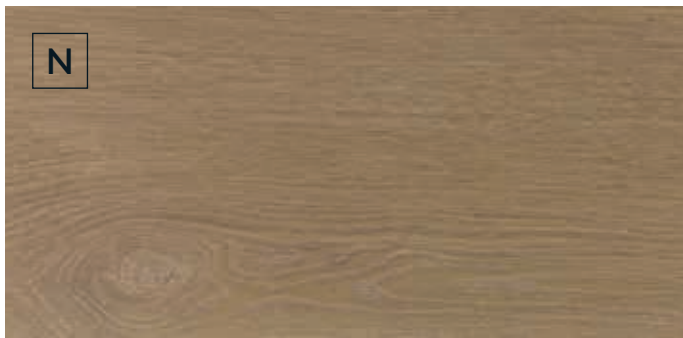


511 Kraft oak
Available in the ranges
Elegant Herringbone / Elegant /
Elegant medium



514 Namur
Available in the ranges
Solid plus / Osmoze / Clip 400



518 Rafia
Available in the ranges
Solid plus / Osmoze / Clip 400

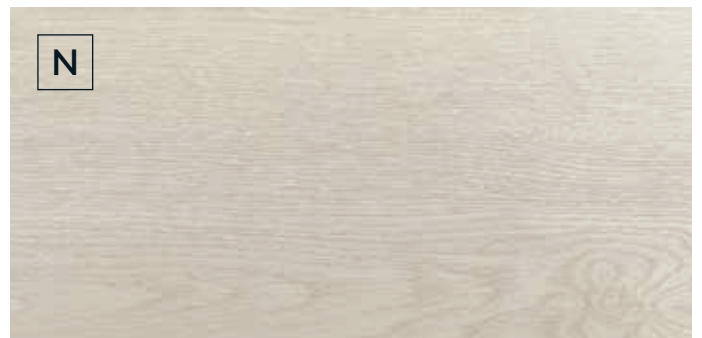

521 Aïda oak
Available in the ranges
Elegant Herringbone / Elegant /
Elegant medium





529 ALMOND OAK



N

524

Poppy oak

Available in the ranges
Elegant Herringbone / Elegant /
Elegant medium



In-Registered
texture



N

525

Calisson oak

Available in the ranges
Elegant Herringbone / Elegant /
Elegant medium



In-Registered
texture



528

Chestnut oak

Available in the ranges
Solid plus / Osmoze / Clip 400



In-Registered
texture



529

Almond oak

Available in the ranges
Herringbone / Solid plus /
Osmoze / Clip 400



In-Registered
texture



535 Praline oak
Available in the ranges
Herringbone / Solid plus /
Osmoze / Clip 400




In-Registered
texture



536 Linen oak
Available in the ranges
Solid plus / Osmoze / Clip 400



In-Registered
texture

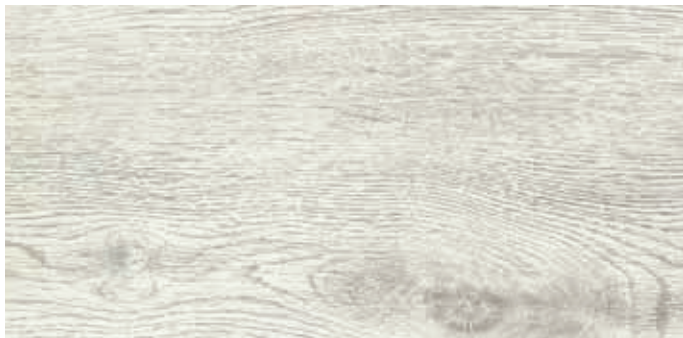

541 Coco oak
Available in the ranges
Osmoze / Clip 400




In-Registered
texture



542 Chokeberry oak
Available in the ranges
Herringbone / Solid plus /
Osmoze / Clip 400



In-Registered
texture

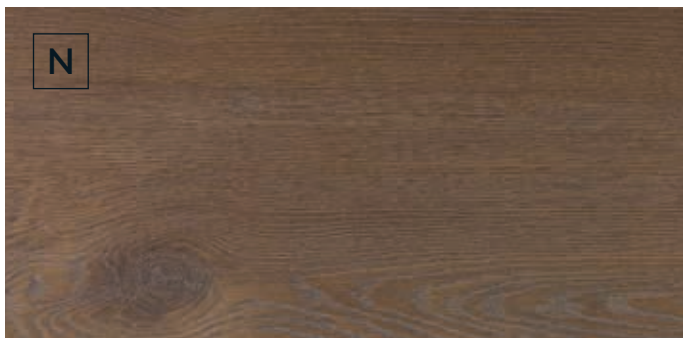

559 Carmine oak
Available in the ranges
Solid plus / Solid medium
Osmoze / Clip 400



In-Registered
texture



560 Stromboli
Available in the ranges
Elegant Herringbone / Elegant /
Elegant medium



In-Registered
texture



619 Sardinia oak
Available in the ranges
Herringbone / Solid plus /
Solid medium



In-Registered
heliochrome



621 Canaries oak
Available in the ranges
Solid plus / Solid medium



In-Registered
heliochrome



622 Balearic oak
Available in the ranges
Herringbone / Solid plus /
Solid medium



In-Registered
heliochrome



627 Polar oak
Available in the range
Solid plus



In-Registered
heliochrome



701 Plato
Available in the ranges
Herringbone / Solid plus /
Solid medium / Osmoze / Clip 400



In-Registered
texture



702 Aristotle
Available in the ranges
Solid plus / Solid medium /
Osmoze / Clip 400



In-Registered
texture



705 Papyrus
Available in the ranges
Osmoze / Clip 400



In-Registered
texture



706 Molly
Available in the ranges
Elegant Herringbone / Elegant /
Elegant medium



In-Registered
texture



707 Gorgias
Available in the ranges: Solid plus /
Solid medium / Elegant Herringbone /
Elegant / Elegant medium



In-Registered
texture



708 Ulysses
Available in the ranges:
Herringbone / Solid plus / Solid medium /
Elegant Herringbone / Elegant /
Elegant medium




In-Registered
texture

2023 DESIGNS

2023 DESIGNS		12 mm			8 mm				
		HERRINGBONE	SOLID PLUS	SOLID MEDIUM	ELEGANT HERRINGBONE	ELEGANT	ELEGANT MEDIUM	OSMOZE	CLIP 400
		P8-9	P10-11	P12-13	P16-17	P18-19	P20-21	P22-23	P24-25
420	Taza oak							●	☐
435	Jefferson	●	●	●					
436	Alpaca oak							●	☐
437	Grey building							●	☐
448	Grey oak							●	●
449	Nevada oak							●	●
450	Nature oak							●	●
471	Sunset	●	●						
508	Bolero oak				☐	☐	☐		
511	Kraft oak				☐	☐	☐		
514	Namur		●					●	☐
518	Rafia		●					●	●
521	Aida oak				☐	☐	☐		
524	Poppy oak				☐	☐	☐		
525	Calisson oak				☐	☐	☐		
528	Chestnut oak		●					●	☐
529	Almond oak	☐	●					●	☐
535	Praline oak	●	●					●	☐
536	Linen oak		●					●	☐
541	Coco oak							●	☐
542	Chokeberry oak	●	●					●	☐
559	Carmine oak		☐	☐				☐	☐
560	Stromboli				☐	☐	☐		
619	Sardinia oak	●	●	●					
621	Canaries oak		●	●					
622	Balearic oak	●	●	●					
627	Polar oak		●						
701	Plato	☐	●	●				●	●
702	Aristotle		●	●				●	●
705	Papyrus							●	●
706	Molly				☐	☐	☐		
707	Gorgias		☐	☐	☐	☐	☐		
708	Ulysses	☐	☐	☐	☐	☐	☐		

TECHNICAL FEATURES

		HERRINGBONE	SOLID PLUS	SOLID MEDIUM
PRODUCT FEATURES	Warranty	← 35 years →		
	Clic system	X Lock	5G®	5G®
	Bevels	4 bevels	4 bevels	4 bevels
	Wet room compatibility	←		
	Underfloor heating compatibility	←		Yes, on low-temp
TESTS AND TECHNICAL FEATURES	PEFC™ - Greenguard and Greenguard Gold	←		
	Class of use • ISO 10874	←		
	Abrasion resistance • EN 13329	← AC6 →		
	Impact resistance • EN 13329	←		
	CE and UKCA labelling • EN 14041	←		
	Health safety labelling	←		
	DOP number • EN 14041	002-20/RPC/2022	002-4/RPC/2013	002-5/RPC/2013
	Slippery • EN 13893	←		
	Reaction to fire • EN 13501-1	←		
	Formaldehyde emission • EN 717-1	←		
	Thermal resistance • EN 12667	← 0.0967 (m² K)/W →		
	Thermal conductivity • EN 12667	← 0.121 W/(m x K) →		
DIMENSIONS AND LOGISTICS	Thickness • mm	← 12 mm →		
	Length x Width • mm - inches	644 x 143 mm 25.35" x 5.63"	1286 x 214 mm 50.62" x 8.43"	1286 x 122 mm 50.62" x 4.80"
	Planks/box	13	6	6
	Area/box • m² - sqf	1.20 m² - 12.91 sqf	1.65 m² - 17.76 sqf	0.94 m² - / 10.12 sqf
	Gross weight/box • kg - lb	13.10 kg - 28.88 lb	18.10 kg - 39.90 lb	10.50 kg - 23.15 lb
	Box/pallet	60	48	78
	Area/pallet • m² - sqf	71.80 m² - 772.85 sqf	79.30 m² - 853.58 sqf	73.40 m² - 790.07 sqf
	Gross weight/pallet • kg - lb	786 kg - 1732.83 lb	869 kg - 1915.82 lb	819 kg - 1805.59 lb



ELEGANT HERRINGBONE	ELEGANT	ELEGANT MEDIUM	OSMOZE	CLIP 400
		25 years		
X Lock	5G®	5G®	5G®	5G®
4 bevels	4 bevels	4 bevels	4 bevels	No
	Water Resistant ⁽¹⁾			
temperature storage underfloor heating, and PRE electric underfloor heating. ⁽²⁾				
	Yes			
	23/33			
		AC5		
	IC3			
	Yes ⁽³⁾			
	A+ ^(*)			
002-17/RPC/2022	002-19/RPC/2022	002-18/RPC/2022	002-8/RPC/2013	002-7/RPC/2013
	DS			
	Cfl-S1			
	E1 ≤ 3.5 mg/m².h			
		0.0661 (m² K)/W		
		0.122 W/(m x K)		
		8 mm		
644 x 143 mm 25.35" x 5.63"	1286 x 192 mm 50.62" x 7.56"	1286 x 122 mm 50.62" x 4.80"	1286 x 192 mm 50.62" x 7.56"	1286 x 192 mm 50.62" x 7.56"
20	9	9	9	9
1.84 m² - 19.81 sqf	2.22 m² - 23.90 sqf	1.41 m² - 15.18 sqf	2.22 m² - 23.90 sqf	2.22 m² - 23.90 sqf
13.15 kg - 29 lb	16.00 kg - 35.27 lb	10.30 kg - 22.71 lb	16.00 kg - 35.27 lb	16.10 kg - 35.49 lb
60	48	78	48	48
110.50 m² - 1189.41 sqf	106.70 m² - 1148.51 sqf	110.10 m² - 1185.11 sqf	106.70 m² - 1148.51 sqf	106.70 m² - 1148.51 sqf
789 kg - 1739.45 lb	768 kg - 1693.15 lb	803 kg - 1770.31 lb	768 kg - 1693.15 lb	768 kg - 1693.15 lb

This information is given for information purpose only and specifications are liable to change without warning.


⁽¹⁾ Information as to emissions of volatile compounds in the indoor air, which might be harmful to the health when inhaled, on a scale from Class A+ (very low emissions) to C (high emissions).

⁽²⁾ No change in appearance and swelling ≤ 0.2 mm. We guarantee water resistance in accordance with NALFA and ISO 4760 standards, subject to compliance with the Alsafloor installation protocol.

⁽³⁾ The thermal resistance of Alsafloor laminate flooring allows it to be installed on low temperature storage underfloor heating systems, and electric underfloor heating systems, subject to compliance with the Alsafloor installation protocol.

^(*) EC and UKCA marking declaration of conformity available on request on our website. All our products comply with the EN 14041 norm.

ACCESSORIES COORDINATED WITH FLOORING DESIGNS

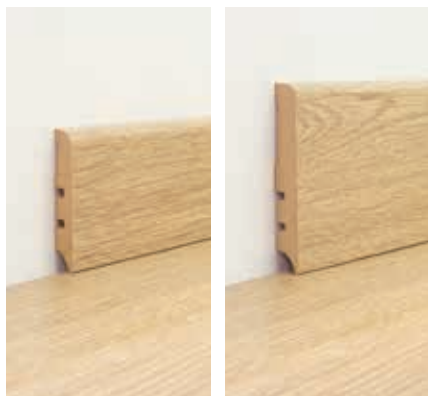

Skirting F58 or F80

Dim: 2200 x 58 x 12 mm - 7.22' x 2.28" x 0.47"
or 2200 x 80 x 15 mm - 7.22' x 3.15" x 0.59".
X 5 skirtings = 11 ml - 36.09'. To clip, tack, screw
or glue.



Scoties

Dim: 2200 x 16 x 16 mm - 7.22' x 0.63" x 0.63".
X 10 skirtings = 22 ml - 72.18'. To tack, screw
or glue.



Transition section profile or T-section

Length: 900 or 1800 mm - 2.95' or 5.91'.
X 10 units, film-wrapped, PVC base
and hardware included.



White skirting F58 or F80

Dim: 2200 x 58 x 12 mm - 7.22' x 2.28" x 0.47"
or 2200 x 80 x 15 mm - 7.22' x 3.15" x 0.59".
Packing: 5 pieces/box = 11 ml - 36.09'.
To clip, tack, screw or glue.



Coated quarter round «Scoties»

Dim: 2200 x 16 x 16 mm - 7.22' x 0.63" x 0.63".
Packing: 10 pieces/box = 22 ml - 72.18'.
To clip, tack, screw or glue.



Adaptable covering skirting

Dim: 2200 x 130 x 16 mm - 7.22' x 5.12" x 0.63".
Packing: 6 pieces/box = 13,2 ml - 43.31'.
Installation: to clip, tack, screw or glue.



Grout liner

For application below our filler as part of the
Water resistant ALSAFLOORING installation
protocol.
Dim: 10 mm x 5 m - 0.39" x 16.40'.



Water resistant filler


For application on a joint base as part of the
ALSAFLOORING Water resistant installation
protocol. 300 ml - 10.14 fl oz PE cartridge
(~300 gr - 0.661 lb), box of 12 units.



Universal skirting adhesive

310 ml - 10.48 fl oz cartridge. Box of 12 units.

UNDERLAYS

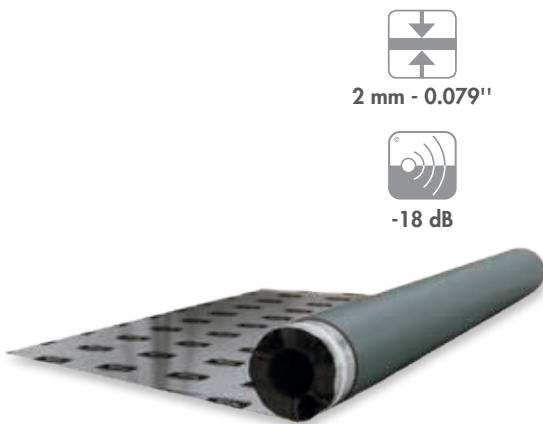

MULTIPROTECT ACOUSTIC

Technical and versatile

PU+PET underlay lined with an aluminium vapour barrier. 26 % airborne noise reduction. High load resistance.




ALSAFOAM

Economical (2 in 1)

1 roll = 25 m² - 269.10 ft²

Acoustic PE underlay ready-fitted with a vapour barrier (200 µ) and overlap strip.

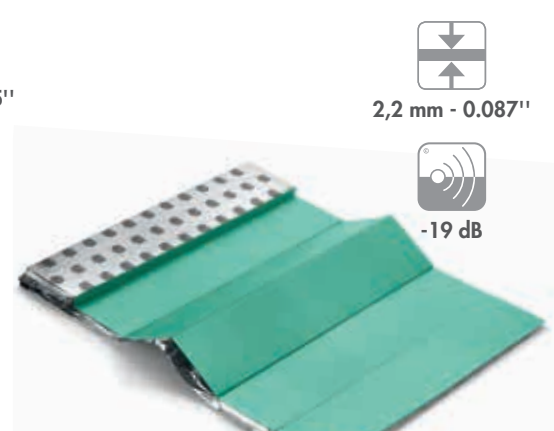

AQUASTOP

Acoustic and thermic

1 box = 6 m² - 64.58 ft²

3-in-1 folding XPS+PET underlay, including integrated vapour barrier and overlap strip. 14% airborne noise reduction.



FLOORISOL

Ecological and thermic

1 box = 7 m² - 75.35 ft²


Stable and durable wood fibre tile underlay. Compensates for gaps of up to 3 mm - 0.12".



ALSAPROTECT

1 box = 20 m² - 215.28 ft²

It prevents moisture rising. Suitable with Floorisol and Conforlay.

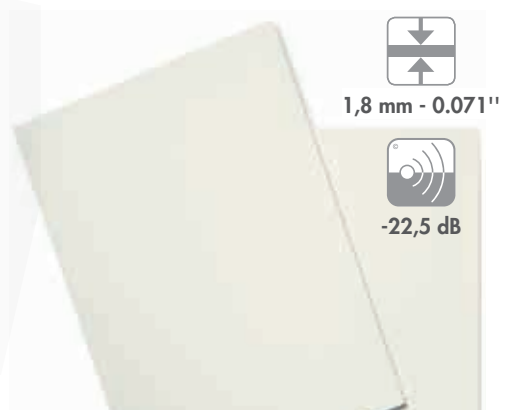

CONFORLAY

Technical and efficient

1 box = 7 m² - 75.35 ft²

Wood fibre underlay. High airborne noise reduction 42 %. Very high load resistance.



For more information please see our Accessories catalogue.



ALSAFLOOR

Z.I. - 1 rue de l'Europe - 67521 Marlenheim Cedex - France
tel. +33 (0)3 88 59 29 89 - fax. +33 (0)3 88 59 28 49

www.alsaflooring.com

A BRAND  **ALSA
FLOORING**